


# Unilift CC 7-A1 (240V,0.25kW,0.4-2.6L/sec,1-7m)





## Contents:

Unilift CC 7 (96280974) .....	2
Quotation text .....	2
Quotation text incl. photo .....	3
Data sheet incl. curve .....	4
Pump curve .....	5
Dimensional drawing .....	6
Wiring diagram .....	7



Position	Qty.	Description	Single Price
	1	<p><b>Unilift CC 7</b> Product No.: 96280974</p> <p>Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level. The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul style="list-style-type: none"> <li>• washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level</li> <li>• cellars or buildings prone to flooding</li> <li>• draining wells</li> <li>• wells for surface water with inlets from roof gutters, pits, tunnels, etc.</li> <li>• swimming pools, ponds or fountains.</li> </ul> <p>The pumps are suitable for both stationary and portable use. They are for automatic operation. The pumps allow free passage of particles up to ø10 mm.</p> <p>The motor incorporates automatic overload protection cutting out the motor in case of overload. When cooled to normal temperature, the motor restarts automatically.</p> <p><b>Technical:</b> Maximum particle size: 10 mm Curve tolerance: ISO 9906 Annex A</p> <p><b>Materials:</b> Pump housing: PP 15 GF Impeller: PPOm 20 GF</p> <p><b>Installation:</b> Pump outlet: G 1 1/4 Maximum installation depth: 10 m</p> <p><b>Liquid:</b> Liquid temperature range: 0 .. 40 °C</p> <p><b>Electrical data:</b> Mains frequency: 50 Hz Rated voltage: 1 x 220-240 V Rated current: 1.8 A Capacitor size - run: 8 µF/450 V Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 10M m Type of cable plug: AUS</p> <p><b>Others:</b> Net weight: 4.6 kg Gross weight: 5.2 kg Shipping volume: 0.017 m³</p>	Price on request

Position	Qty.	Description	Single Price																																				
	1	<p data-bbox="296 163 432 192"><b>Unilift CC 7</b></p>  <p data-bbox="683 589 1219 618"><b>Note! Product picture may differ from actual product</b></p> <p data-bbox="296 645 549 674">Product No.: 96280974</p> <p data-bbox="296 701 1251 757">Grundfos Unilift CC pumps are single-stage submersible pumps with a low suction ability down to 3 mm water level.</p> <p data-bbox="296 759 1147 788">The pumps are designed for pumping rainwater and grey wastewater, e.g. from</p> <ul data-bbox="296 790 1244 929" style="list-style-type: none"> <li>• washing machines, baths, sinks, etc. from low-lying parts of buildings up to sewer level</li> <li>• cellars or buildings prone to flooding</li> <li>• draining wells</li> <li>• wells for surface water with inlets from roof gutters, pits, tunnels, etc.</li> <li>• swimming pools, ponds or fountains.</li> </ul> <p data-bbox="296 956 948 985">The pumps are suitable for both stationary and portable use.</p> <p data-bbox="296 987 655 1016">They are for automatic operation.</p> <p data-bbox="296 1019 916 1048">The pumps allow free passage of particles up to <math>\varnothing 10</math> mm.</p> <p data-bbox="296 1075 1217 1131">The motor incorporates automatic overload protection cutting out the motor in case of overload.</p> <p data-bbox="296 1133 1046 1162">When cooled to normal temperature, the motor restarts automatically.</p> <p data-bbox="296 1189 419 1218"><b>Technical:</b></p> <table data-bbox="296 1220 863 1274"> <tr> <td>Maximum particle size:</td> <td>10 mm</td> </tr> <tr> <td>Curve tolerance:</td> <td>ISO 9906 Annex A</td> </tr> </table> <p data-bbox="296 1301 411 1330"><b>Materials:</b></p> <table data-bbox="296 1332 807 1386"> <tr> <td>Pump housing:</td> <td>PP 15 GF</td> </tr> <tr> <td>Impeller:</td> <td>PPOm 20 GF</td> </tr> </table> <p data-bbox="296 1413 435 1442"><b>Installation:</b></p> <table data-bbox="296 1444 743 1503"> <tr> <td>Pump outlet:</td> <td>G 1 1/4</td> </tr> <tr> <td>Maximum installation depth:</td> <td>10 m</td> </tr> </table> <p data-bbox="296 1529 379 1559"><b>Liquid:</b></p> <table data-bbox="296 1561 764 1592"> <tr> <td>Liquid temperature range:</td> <td>0 .. 40 °C</td> </tr> </table> <p data-bbox="296 1619 472 1648"><b>Electrical data:</b></p> <table data-bbox="296 1650 813 1879"> <tr> <td>Mains frequency:</td> <td>50 Hz</td> </tr> <tr> <td>Rated voltage:</td> <td>1 x 220-240 V</td> </tr> <tr> <td>Rated current:</td> <td>1.8 A</td> </tr> <tr> <td>Capacitor size - run:</td> <td>8 <math>\mu</math>F/450 V</td> </tr> <tr> <td>Enclosure class (IEC 34-5):</td> <td>IP68</td> </tr> <tr> <td>Insulation class (IEC 85):</td> <td>F</td> </tr> <tr> <td>Length of cable:</td> <td>10M m</td> </tr> <tr> <td>Type of cable plug:</td> <td>AUS</td> </tr> </table> <p data-bbox="296 1906 384 1935"><b>Others:</b></p> <table data-bbox="296 1937 759 2022"> <tr> <td>Net weight:</td> <td>4.6 kg</td> </tr> <tr> <td>Gross weight:</td> <td>5.2 kg</td> </tr> <tr> <td>Shipping volume:</td> <td>0.017 m<sup>3</sup></td> </tr> </table>	Maximum particle size:	10 mm	Curve tolerance:	ISO 9906 Annex A	Pump housing:	PP 15 GF	Impeller:	PPOm 20 GF	Pump outlet:	G 1 1/4	Maximum installation depth:	10 m	Liquid temperature range:	0 .. 40 °C	Mains frequency:	50 Hz	Rated voltage:	1 x 220-240 V	Rated current:	1.8 A	Capacitor size - run:	8 $\mu$ F/450 V	Enclosure class (IEC 34-5):	IP68	Insulation class (IEC 85):	F	Length of cable:	10M m	Type of cable plug:	AUS	Net weight:	4.6 kg	Gross weight:	5.2 kg	Shipping volume:	0.017 m <sup>3</sup>	Price on request
Maximum particle size:	10 mm																																						
Curve tolerance:	ISO 9906 Annex A																																						
Pump housing:	PP 15 GF																																						
Impeller:	PPOm 20 GF																																						
Pump outlet:	G 1 1/4																																						
Maximum installation depth:	10 m																																						
Liquid temperature range:	0 .. 40 °C																																						
Mains frequency:	50 Hz																																						
Rated voltage:	1 x 220-240 V																																						
Rated current:	1.8 A																																						
Capacitor size - run:	8 $\mu$ F/450 V																																						
Enclosure class (IEC 34-5):	IP68																																						
Insulation class (IEC 85):	F																																						
Length of cable:	10M m																																						
Type of cable plug:	AUS																																						
Net weight:	4.6 kg																																						
Gross weight:	5.2 kg																																						
Shipping volume:	0.017 m <sup>3</sup>																																						


Description	Value
Product name:	Unilift CC 7
Product No:	96280974
EAN number:	5700830812020
Technical:	
Max flow:	10 m <sup>3</sup> /h
Head max:	7 m
Maximum particle size:	10 mm
Curve tolerance:	ISO 9906 Annex A
Materials:	
Pump housing:	PP 15 GF
Impeller:	PPOm 20 GF
Installation:	
Pump outlet:	G 1 1/4
Maximum installation depth:	10 m
Liquid:	
Liquid temperature range:	0 .. 40 °C
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Rated current:	1.8 A
Capacitor size - run:	8 µF/450 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	YES
Length of cable:	10M m
Type of cable plug:	AUS
Controls:	
Level switch:	float switch
Others:	
Net weight:	4.6 kg
Gross weight:	5.2 kg
Shipping volume:	0.017 m <sup>3</sup>

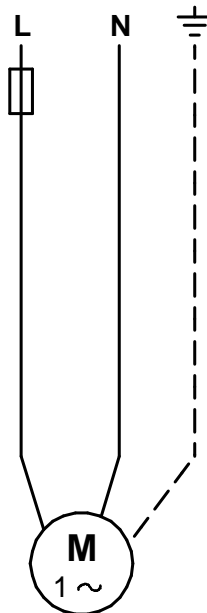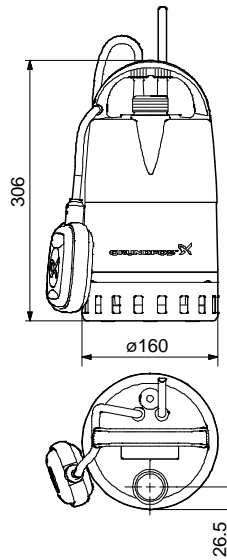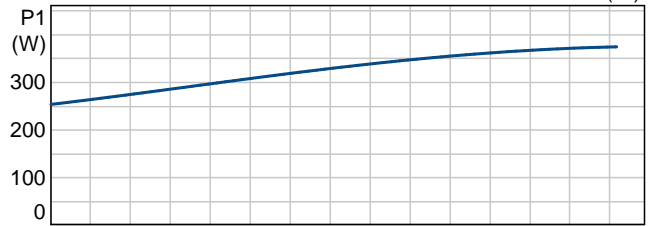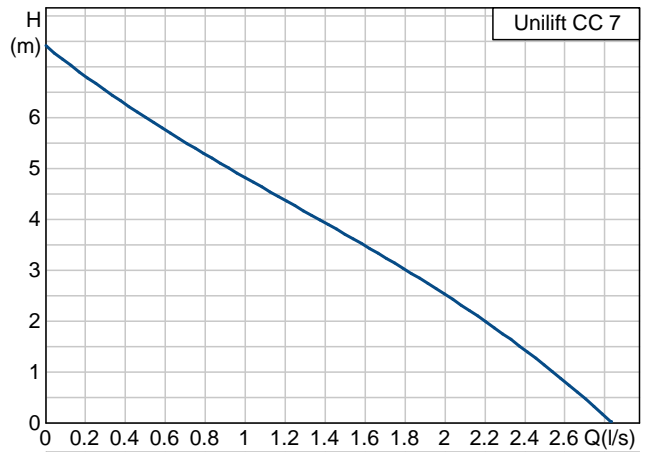


# 96280974 Unilift CC 7

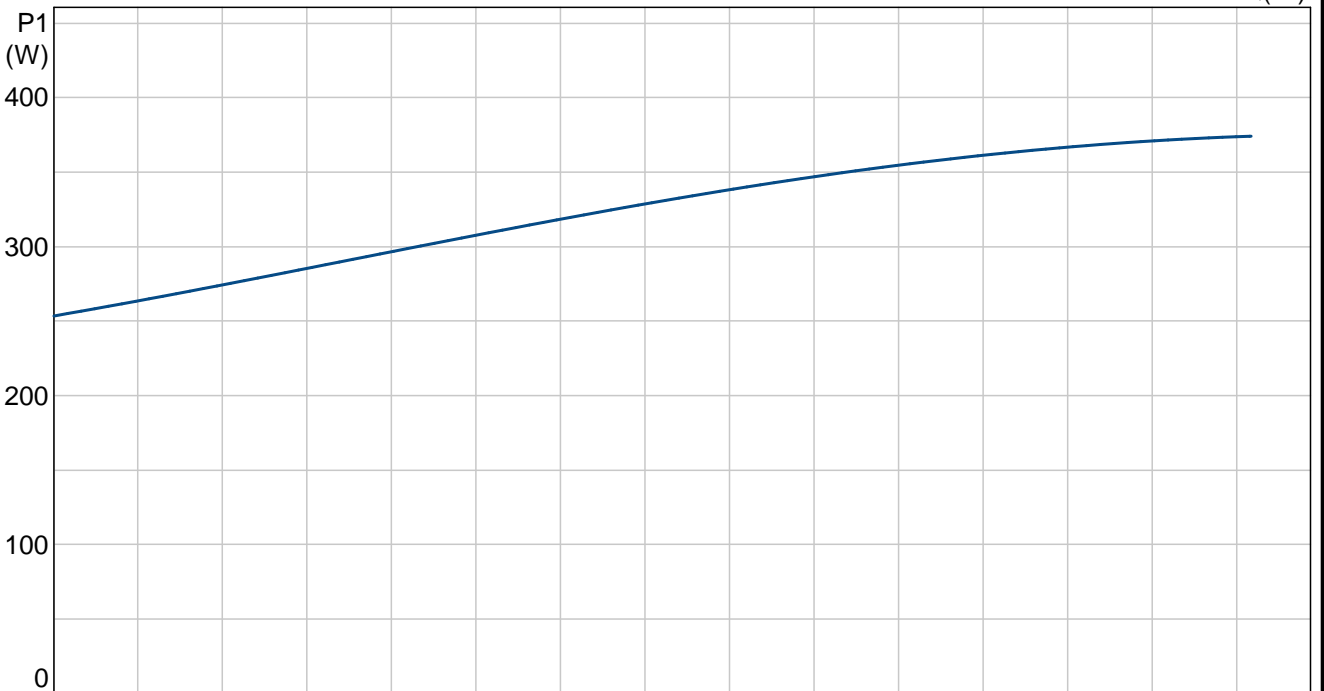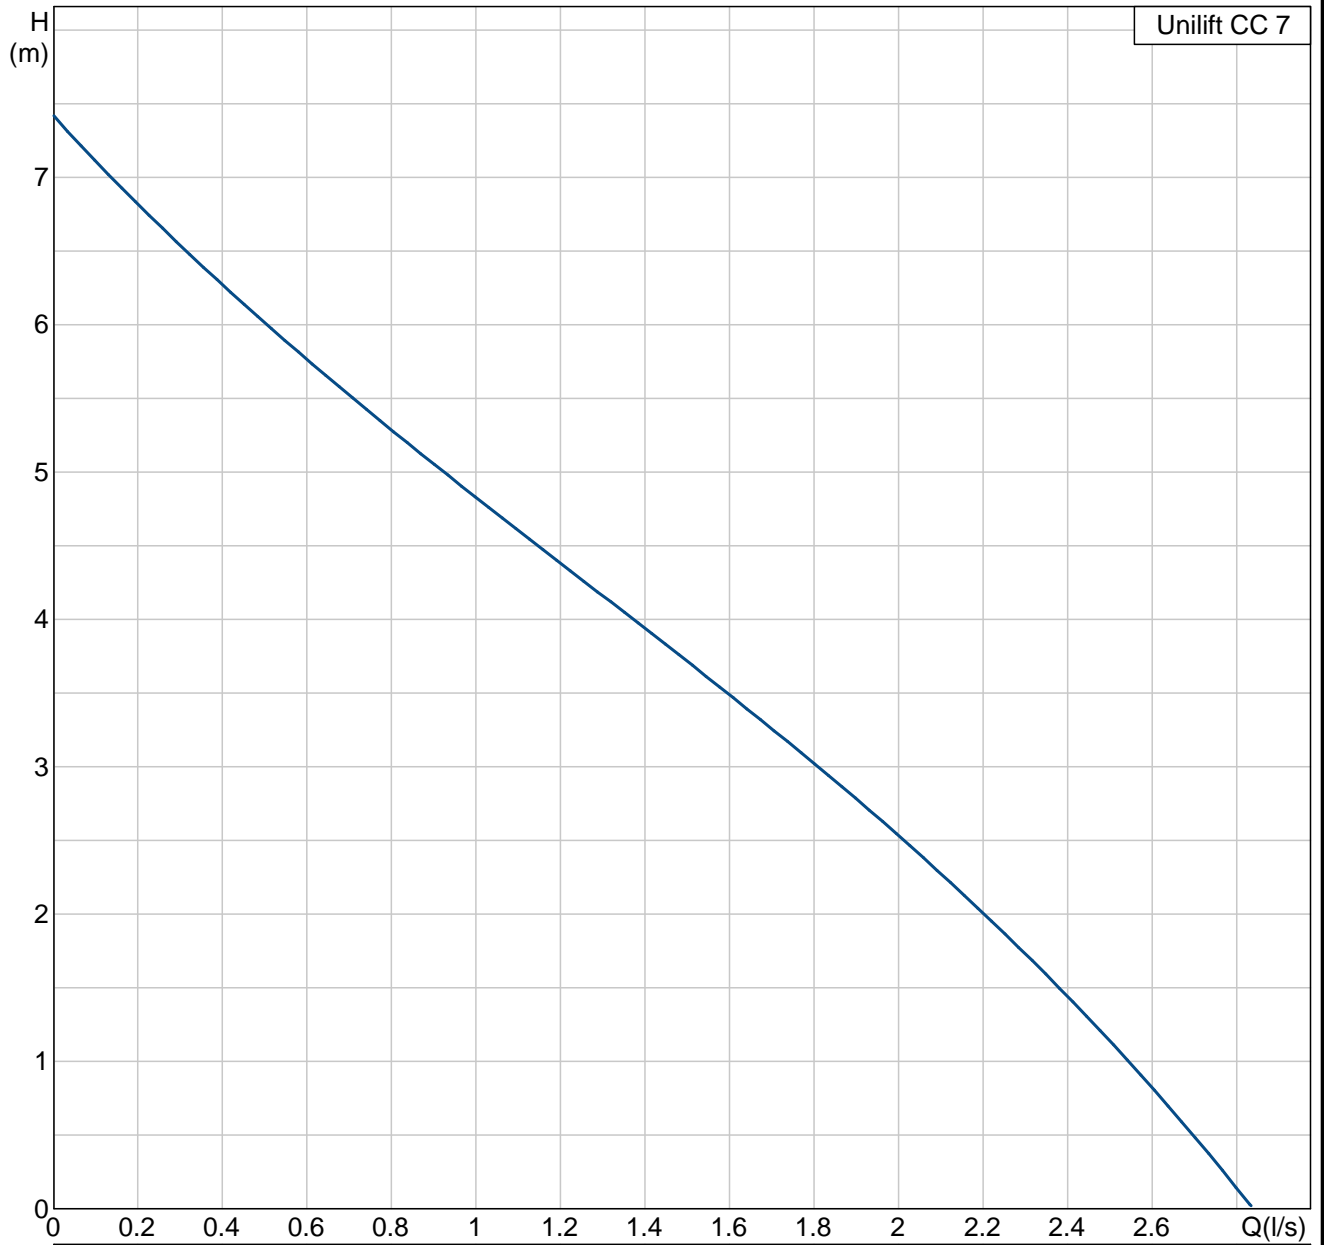

96280974 Unilift CC 7

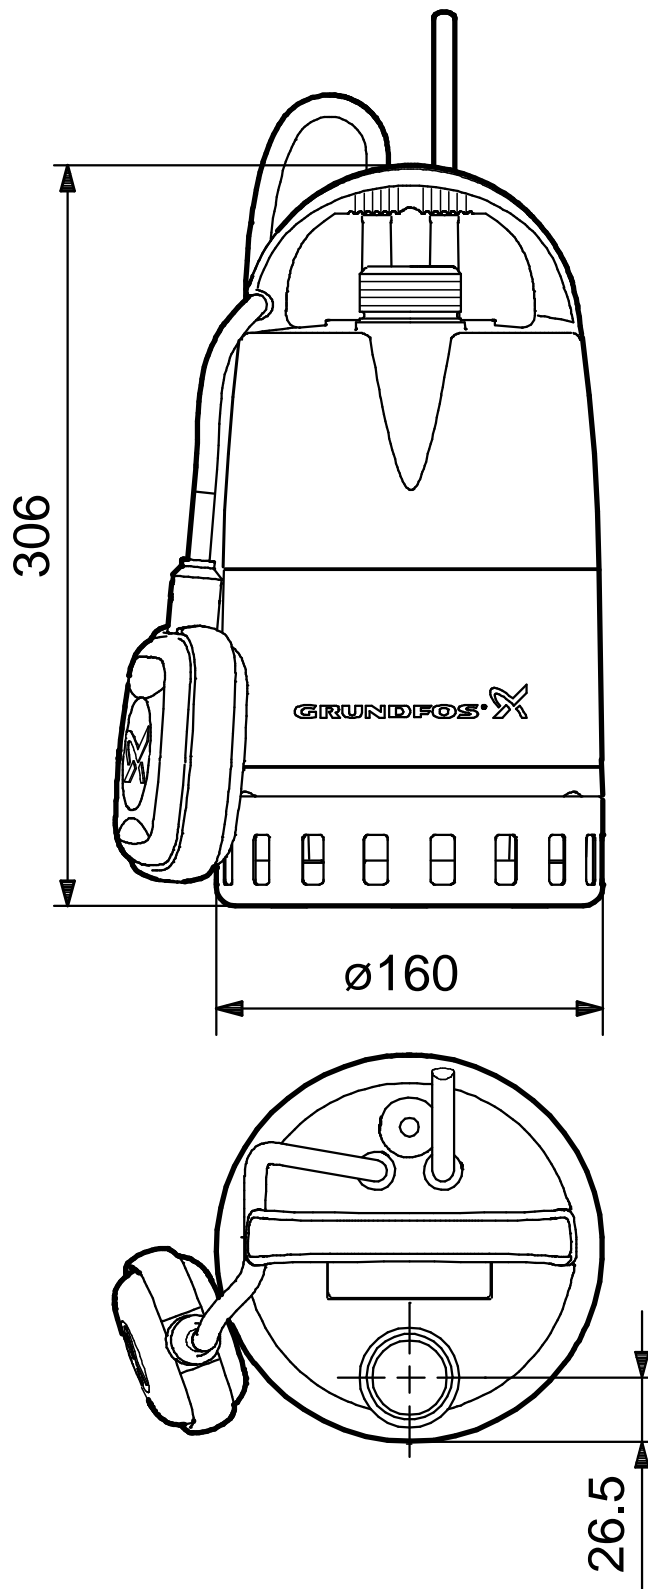

Note! All units are in [mm] unless others are stated.

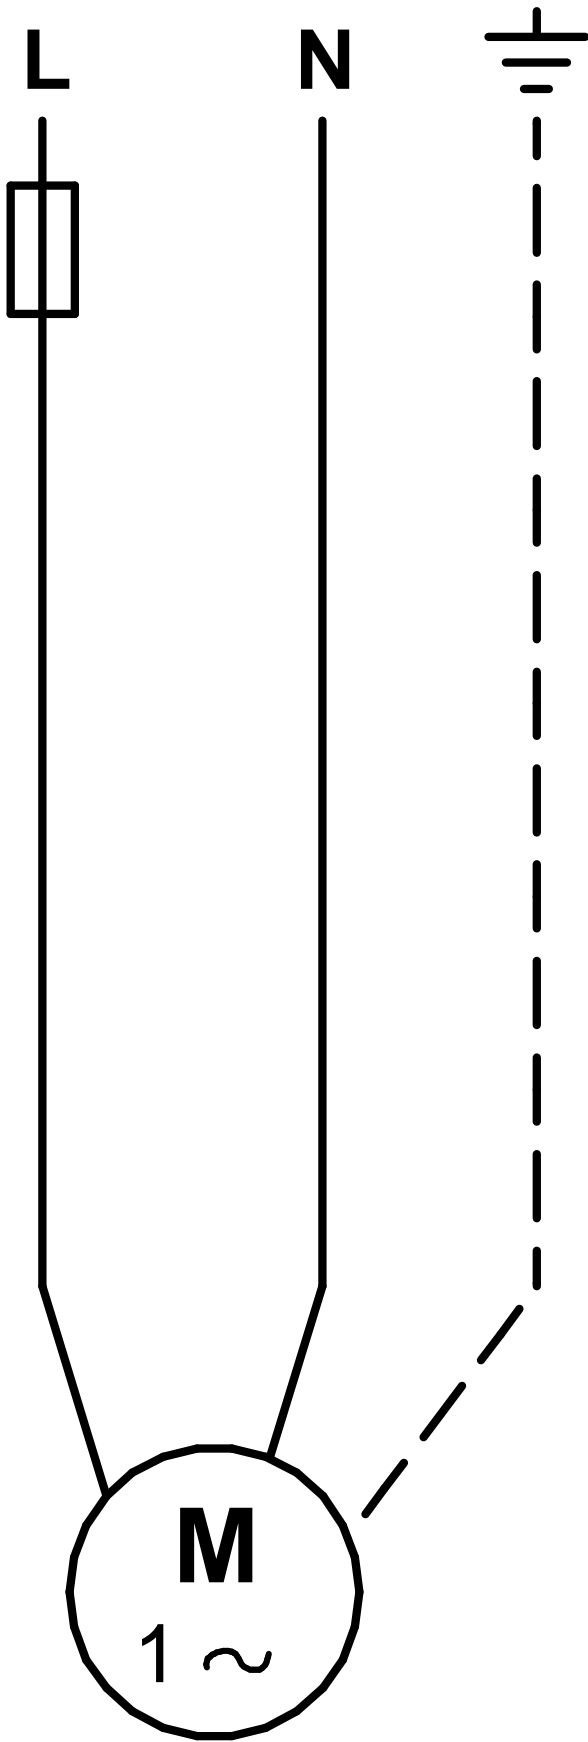

Note! All units are in [mm] unless others are stated.